

ASi-5/ASi-3 POWERLINK-Gateway with integrated ASi-5/ASi-3 Safety Monitor, 6SI/6SO

ASi-5 – Great data bandwidth, short cycle times

Compatible with all ASi generations

Safety Monitor supports ASi-5 Safety and ASi-3 Safety

2 ASi-5/ASi-3 Masters, POWERLINK device

- integrated Hub

Up to 64 release circuits

- up to 6 release circuits SIL 3, cat. 4 on the Monitor, electronic safe outputs

Safe ASi outputs are supported

- up to 64 independent ASi outputs
Multiple safe ASi outputs possible via a single ASi address

OPC UA interface and REST API for IIoT applications

Integrated web server for simple diagnostics and maintenance

Selection of mode of safe operation

Safe speed and standstill monitoring


Applications up to category 4/PLe/SIL 3

Chip card for storage of configuration data



(figure similar)



Figure	Fieldbus Interface	Safety communication	Inputs Safety ⁽¹⁾	Outputs Safety ⁽²⁾	ASi-5/ASi-3	ASi Safety	Number of ASi networks, number of ASi Master ⁽³⁾	Integrated decoupling, ASi current measurement in the gateway ⁽⁴⁾	Diagnostic and configuration interface ⁽⁵⁾	Art. no.
	POWERLINK, OPC UA, REST API	Safe Link	6 x 1 channel or 3 x 2 channels	6 release circuits; 6 x electronic safe outputs	ASi-5 + ASi-3 compatible	ASi-5 + ASi-3 Safety compatible	2 ASi networks, 2 ASi-5/ASi-3 Masters	yes, max. 4 A/ASi network	Ethernet diagnostic	BWU3961

(1) Output Safety

Suitable for applications up to category 4/PLe/SIL 3.

(2) Inputs Safety

Safe inputs can be configured as 1-channel or 2-channels depending on the desired application or PL and SIL level. Suitable for applications up to category 4/PLe/SIL 3.

(3) Number of ASi networks, number of ASi Master

"Double Master": 2 ASi networks, 2 ASi-5/ASi-3 Masters.

(4) Integrated decoupling, ASi current measurement in the gateway

"yes, max. 4 A/ASi network": Data decoupling integrated in the gateway. Cost-effective power for 2 ASi networks with 1 power supply (optionally supply of multiple Single Gateways by 1 power supply). Operation with short cable lengths with standard 24 V power supply possible.

(5) Diagnostic and configuration interface

"Ethernet diagnostic": Access to ASi master and safety monitor via Bihl+Wiedemann proprietary software over Ethernet diagnostics interface.

The latest version of the device description file of the gateway is available in the "Downloads" section of the respective device.

ASi-5/ASi-3 POWERLINK-Gateway with integrated ASi-5/ASi-3 Safety Monitor, 6SI/6SO

Article no.	BWU3961
Fieldbus interface	
Type	POWERLINK 2 x RJ-45, integrated 2-Port-Hub
Baud rates	10/100 MBd
IT interface	–
Safety communication	–
Card slot	chip card (BW4785) for storage of configuration data
Ethernet interface	
Type	Ethernet RJ-45 according to IEEE 802.3
Baud rate	10/100 MBaud half-duplex or full-duplex
Safety communication	Safe Link
IT interface	OPC UA server, web server, REST API
ASi	
ASi specification	ASi-5 + ASi-3
Cycle time	Cycle time ASi-5 (constant): 1,27 ms for 384 bits input data + 384 bits output data
	Cycle time ASi-3 (variable): 150 μ s * (number of ASi-3 nodes + 2)
ASi Safety	ASi-5 + ASi-3 Safety compatible
Operating voltage	30 V _{DC} (20 ... 31,6 V) (PELV voltage)
Operating current	ca. 300 mA
Current per ASi network	max. 4 A
ASi Power24V capability ⁽¹⁾	yes
Length of ASi cable	with 24 V power supply: max. 50 m
	with 30 V power supply: max. 100 m with ASi-3 / max. 200 m with ASi-5
AUX	
Operating voltage	24 V _{DC} (19,2 ... 28,8 V)
Max current consumption	7,2 A
Display	
LCD	menu, indication of ASi addresses and error messages in plain text
LED POWERLINK (green)	POWERLINK communication activ
LED power (green)	power on
LED config error (red)	configuration error
LED U ASi (green)	ASi voltage o.k.
LED ASi active (green)	ASi normal operation active
LED prg enable (green)	automatic address programming enabled
LED prj mode (yellow)	configuration mode active
LED AUX (green)	ASi power on and auxiliary power on
LEDs SI1 ... SI6 (yellow)	state of inputs: LED off: open LED on: closed
LEDs SO1 ... SO6 (yellow)	state of outputs: LED off: open LED on: closed
UL-specifications (UL508)	
External protection	An isolated voltage source with a PELV/SELV voltage ≤ 30 V _{DC} must have internal or external current limiting.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

ASi-5/ASi-3 POWERLINK-Gateway with integrated ASi-5/ASi-3 Safety Monitor, 6SI/6SO

Article no.	BWU3961
Environment	
Angewandte Normen	EN60529 EN 62026-2 EN 61000-6-2 EN 61000-6-4 EN 61131-2 EN 61326-3-1 EN 50581 EN 62061, SIL 3 EN 61508, SIL 3 EN ISO 13849-1, Performance-Level e EN ISO 13849-2
Operating altitude	max. 2000 m
Ambient temperature	-25 °C ... +55 °C (no condensation permitted)
Storage temperature	-25 °C ... +85 °C
Housing	stainless steel, for DIN rail mounting
Pollution Degree	2
Protection category	IP20
Tolerable loading referring to humidity	according to EN 61131-2
Maximum tolerable shock and vibration stress	according to EN 61131-2
Voltage of insulation	≥500 V
Weight	800 g
Dimensions (W / H / D in mm)	109 / 120 / 106

(1) **ASi Power24V**


The device can be operated directly on a 24 V (PELV) power supply. The gateway has been optimized with integrated data coupling coils and adjustable self-resetting fuses for safe use of powerful 24 V power supplies.

Article no.	BWU3961
Safety monitor	
ASi Safety	ASi-5 + ASi-3 Safety compatible
Start delay	< 10 ms
Max. turn-off time	< 40 ms
Antivalent switches for local inputs	yes
Standstill monitors for local inputs	6 axes, up to 50 Hz ⁽¹⁾
Speed monitors for local inputs	3 to 6 axes, up to 400 Hz ⁽²⁾
Selection of Mode of Safe Operation	yes
Connection	
Connection	Push-in terminals
Length of connector cable	unlimited ⁽³⁾
Input	
Inputs safety	6 x 1 channel safe inputs (SIL1, cat 2, PLc) or 3 x 2 channels safe input (SIL3, cat. 4, PLe) ⁽⁴⁾
Inputs digital, EDM	up to 12 standard inputs ⁽⁴⁾
Switching current	15 mA (T = 100 µs), continuously 4 mA at 24 V
Power supply	out of AUX

ASi-5/ASi-3 POWERLINK-Gateway with integrated ASi-5/ASi-3 Safety Monitor, 6SI/6SO


Article no.	BWU3961
Output	
Number of release circuits on the monitor	6 release circuits; 6 x electronic safe outputs ⁽⁴⁾
Outputs	semiconductor output max. contact load: 1,2 A _{DC-13} at 30 V, $\Sigma = 7,2$ A in sum ⁽⁵⁾
Power supply (semiconductor outputs)	out of AUX
Test pulse (semiconductor outputs)	if output is on: minimum interval between 2 test pulses: 250 ms; maximum pulse width 1 ms

- (1) connection at all SI or SO terminals possible.
 (2) connection only at terminals SO1 ... SO6 configured as standard inputs (see "Variations of terminal configuration for BWU3961")
 (3) loop resistance $\leq 150 \Omega$
 (4) see "Variations of terminal configuration for BWU3961"
 (5)

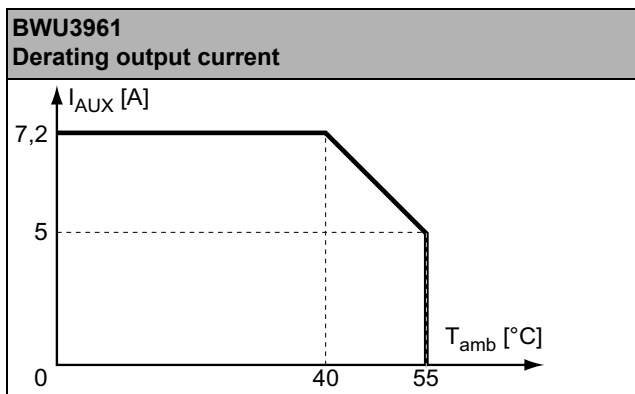

	BWU3961
Data decoupling integrated in the gateway	•
Current measurement of the ASi circuits	•
Self-resetting adjustable fuses	•
ASi earth fault monitor distinguishes between ASi cable and sensor cable	•
Cost-effective power for 2 ASi networks with 1 power supply	•

Safety outputs block diagram BWU3961:

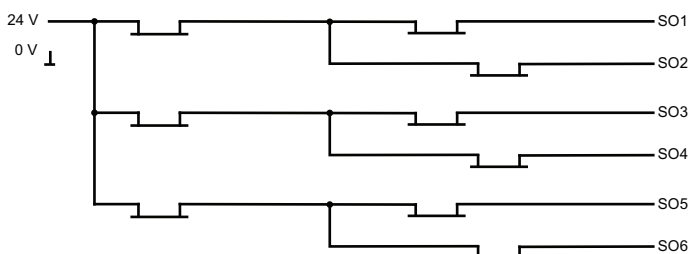

ASi-5/ASi-3 POWERLINK-Gateway with integrated ASi-5/ASi-3 Safety Monitor, 6SI/6SO

Variations of terminal configuration for BWU3961

Terminal	up to 6 safe outputs	up to 6 x 2 channels safe input for floating contacts in combination with T1, T2 ⁽¹⁾	up to 6 x 2 channels safe inputs for antivalent switches ⁽¹⁾	up to 3 x 2 channels safe inputs for OSSDs ⁽¹⁾	up to 12 x 1 channel safe inputs ⁽¹⁾	up to 12 standard inputs ⁽¹⁾
SI1	–	•	•	•	•	•
SI2	–	•	•	•	•	•
SI3	–	•	•	•	•	•
SI4	–	•	•	•	•	•
SI5	–	•	•	•	•	•
SI6	–	•	•	•	•	•
SO1 ⁽²⁾	•	•	•	–	•	•
SO2 ⁽²⁾	•	•	•	–	•	•
SO3 ⁽²⁾	•	•	•	–	•	•
SO4 ⁽²⁾	•	•	•	–	•	•
SO5 ⁽²⁾	•	•	•	–	•	•
SO6 ⁽²⁾	•	•	•	–	•	•

⁽¹⁾ Inputs must be supplied from the same 24V voltage source connected to the supply terminals of the local safe I/Os of the device.

⁽²⁾ If outputs are configured as inputs, the input current has to be limited by an external element at ≤ 100 mA.

Connections: Gateway + Safety Monitor:

BWU3961	Connection	Description
<p>The diagram shows a terminal block with two main sections. The top section is labeled 'safe inputs/standard inputs' and includes terminals T1, T2, SI1-SI6. The bottom section is labeled 'safe outputs' and includes terminals SO1-SO6, 24V, and 0V. On the left, there are terminals for '+ASI 1-', '+ASI 1+', '+ASI 2-', and 'ASI +PWR- (max. 8A)'. Wires are shown connecting these terminals to the device.</p>	SI1, SI3, SI5	Safe input terminal (T1)
	SI2, SI4, SI6	Safe input terminal (T2)
	T1	Clock output 1
	T2	Clock output 2
	SO1 ... SO6	Safe semiconductor outputs 1 ... 6
	24 V, 0 V	Power supply for local I/Os
	+ASI 1-, +ASI 2-	Connection of ASi circuits
	ASI +PWR-	Power supply for Gateway and ASi networks

Accessories:

- Safe contact expander, 1 or 2 independent channels (art. no. BWU2548 / BWU2539)
- Chip card for storage of configuration and additional data (art. no. BW4785)
- Bihl+Wiedemann Safety Suite - Safety Software for Configuration, Diagnostics and Commissioning (art. no. BW2916)
- Power supplies, e.g.: 30 V power supply, 4 A, 1 phase (art. no. BW4218), 30 V power supply, 8 A, 1 phase (art. no. BW4219), 30 V power supply, 8 A, 3 phases (art. no. BW4220), 30 V Power Supply, 16 A, 1 phase (art. no. BW4221), 30 V Power Supply, 16 A, 3 phases (art. no. BW4222) (for further power supply units visit www.bihl-wiedemann.de/en/products/accessories/power-supplies)