

2 x connectors for profile cable

Periphery connection via

1 x M12 cable socket, straight, 8 poles +
3 x M12 cable sockets, straight, 5 poles

For SEW MOVIMOT with binary control

Suitable for option with plug connector AVR1



(figure similar)



Figure	Type	Number of Drives	Inputs digital	Outputs digital	Input voltage (sensor supply) (1)	Output voltage (actuator supply) (2)	ASi connection (3)	Connection (4)	ASi address (5)	Special function	Art. no.
	IP67, depth 35 mm	1	3	–	out of ASi	out of AUX	ASi profile cable	1 x M12 cable socket, straight, 8 poles + 3 x M12 cable socket, straight, 5 poles	1 single address	for connecting SEW MOVIMOT to ASi	BWU3631
	IP67, depth 35 mm	1	3	–	out of ASi	out of AUX	ASi profile cable	1 x M12 cable socket, straight, 8 poles + 3 x M12 cable socket, straight, 5 poles	1 AB address	for connecting SEW MOVIMOT to ASi	BWU3782

(1) **Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.

(2) **Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential

(3) **ASi connection:** the connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).

(4) **Connection:** further connection options are available on request.



M12 cable socket, angled	M12 cable socket, straight	M8 cable socket, straight	round cable / connecting wires	Push in terminals
PUR line: oil resistant				

(5) **ASi address:** 1 AB address (max. 62 AB addresses/ASi network), 2 AB addresses (max. 31 modules with 2 AB addresses), Single addresses (max. 31 Single addresses/ASi network), mixed use allowed.
For modules with two ASi nodes the second ASi node is turned off as long as the first ASi node is addressed to address "0".
Upon request, ASi nodes are available with specific ASi address profiles.

Article No.	BWU3631		BWU3782	
General data				
Device type	input/output			
Connection				
ASi/AUX connection	profile cable and piercing			
Periphery connection	1 x M12 cable socket, straight, 8 poles + 3 x M12 cable sockets, straight, 5 poles			
M12 wiring ⁽¹⁾	single wiring (I2 ... I4)			
Length of connector cable	1 m (I1, O1 ... O4), 0,3 m (I2 ... I4)		2 m (I1, O1 ... O4), 0,3 m (I2 ... I4)	
	max. allowed tensile strain 10 N			
ASi				
Profile	S-7.0.E (ID1=F default)		S-7.A.7 (ID1=7 fixed)	
Address	1 single address		1 AB address	
Required Master profile	≥M0		≥M3	
As of ASi specification	2.0		2.1	
Operating voltage	30 V _{DC} (18 ... 31.6 V)			
Max. current consumption	165 mA			
Max. current consumption without sensor/ actuator supply	45 mA			
AUX				
Operating voltage	24 V _{DC} (18 ... 30 V)			
Max. current consumption	3 A			
Input				
Number	3 (I2 ... I4)			
Power supply	out of ASi			
Power supply of attached sensors	up to +40 °C	120 mA ⁽²⁾		
	at +55 °C	80 mA ⁽²⁾		
	at +60 °C	60 mA ⁽²⁾		
Switching threshold	U < 5 V (low) U > 15 V (high)			
Drive				
Number	1 (I1, O1 ... O4)			
Power supply	out of AUX			
Output	short-circuit and overload protected according to EN 61131-2			
Max. output current	up to +40 °C	Σ (Motor) ≤ 3 A ⁽³⁾		
	at +55 °C	Σ (Motor) ≤ 2 A ⁽³⁾		
	at +60 °C	Σ (Motor) ≤ 1,5 A ⁽³⁾		
Safe disconnection of output voltage	yes up to PLe			
Display				
LED ASi/FLT (red/green)	green: ASi voltage OK, ASi node online green/red: ASi voltage on, but ASi node offline green flashing/red: address 0 red/green flashing: peripheral fault ⁽⁴⁾ off: no ASi voltage			
LED AUX (green)	on: 24 V _{DC} AUX off: no 24 V _{DC} AUX			
LED I1 ... In (yellow)	state of inputs I1 ... I4			
LED O1 ... On (yellow)	state of outputs O1 ... O4			

Article No.	BWU3631	BWU3782
Environment		
Applied standards	EN ISO 13849-1 PLe EN ISO13849-2	
	EN 62026-2 EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529	
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes ⁽⁵⁾	
Operating altitude	max. 2000 m	
Ambient temperature	-30 °C ... +60 °C ⁽²⁾ ⁽³⁾ ⁽⁶⁾	
Storage temperature	-25 °C ... +85 °C	
Housing	plastic, screw mounting, suitable for cable ducts (installation depth ≥35mm)	
Pollution Degree	2	
Protection category	IP67	
Tolerable loading referring to humidity	according to EN 61131-2	
Maximum tolerable shock and vibration stress	≤15g, T≤11 ms 10 ... 55 Hz, 0,5 mm amplitude	
Insulation voltage	≥500 V	
Weight	100 g	
Dimensions (W / H / D) in mm	60 / 45 / 35	

- (1) **M12 wiring:**
Single-wiring: 1 input or output per connection
Y-wiring: 2 inputs or outputs per connection
Mixed-wiring: 1 input and 1 output per connection

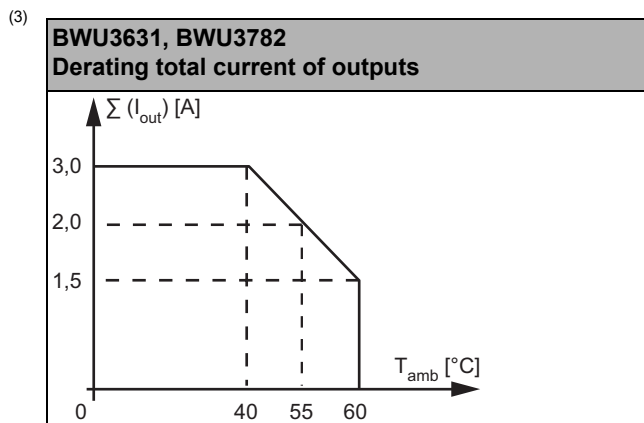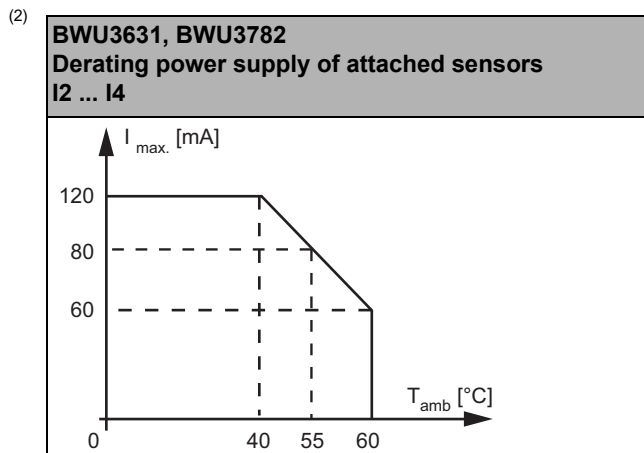

- (4) see table "Peripheral fault indication"
- (5) The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.
- (6) Down to -25 °C with flexibly mounted cable, -30 °C only with fixed mounted cable.

Article no.	Peripheral fault indication		
	Overload sensor supply	Output short circuited	AUX voltage missing
BWU3631	•	-	•
BWU3782	•	-	•

UL-specifications (UL61010) BWU3631, BWU3782	
External protection	An isolated source with a secondary open circuit voltage of $\leq 30 V_{DC}$ with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

Programming	Parameter bit			
	D3	D2	D1	D0
	input			
BWU3631 / BWU3782	I4	I3	I2	1 (Motor)
	output			
BWU3631 / BWU3782	O4 (Motor)	O3 (Motor)	O2 (Motor)	O1 (Motor)
	parameter bit			
	P3	P2	P1	P0
BWU3631 / BWU3782	not used	0= on / 1= off (synchronous I/O mode)	0= off / 1= on (peripheral fault, if AUX missing)	0= off / 1= on (Watchdog)


Pin assignment

Signal name	Explanation
Ix	digital input x
Ox	digital output x
24V _{ext out}	power supply, out of external voltage, positive pole (AUX, actuator supply)
0V _{ext out}	power supply, out of external voltage, negative pole (AUX, actuator supply)
24V _{out of ASi}	power supply, out of ASi, positive pole (sensor supply)
0V _{out of ASi}	power supply, out of ASi, negative pole (sensor supply)
ASi +, ASi -	connection to ASi bus
n.c. (not connected)	not connected

Connections:

Article no.	M12, 8 poles	Pin1 (WH)	Pin2 (BN)	Pin3 (GN)	Pin4 (YE)	Pin5 (GY)	Pin6 (PK)	Pin7 (BU)	Pin8 (RD)
BWU3631	X1	I1 (K1b)	O1 (24 V)	O2 (R)	O3 (L)	O4 (f1/f2)	n.c (K1a)	0 V ext out	n.c.
	M12, 5 poles	Pin1 (BN)	Pin2 (WH)	Pin3 (BU)	Pin4 (BK)	Pin5 (–)			
	X2	24 V out of ASi	n.c.	0 V out of ASi	I4	n.c.	–		
	X3	24 V out of ASi	n.c.	0 V out of ASi	I3	n.c.	–		
	X4	24 V out of ASi	n.c.	0 V out of ASi	I2	n.c.	–		
Article no.	M12, 8 poles	Pin1 (WH)	Pin2 (BN)	Pin3 (GN)	Pin4 (YE)	Pin5 (GY)	Pin6 (PK)	Pin7 (BU)	Pin8 (RD)
BWU3782	X1	I1 (K1b)	O4 (24 V)	O1 (R)	O2 (L)	O3 (f1/f2)	n.c (K1a)	0 V ext out	n.c.
	M12, 5 poles	Pin1 (BN)	Pin2 (WH)	Pin3 (BU)	Pin4 (BK)	Pin5 (–)			
	X2	24 V out of ASi	n.c.	0 V out of ASi	I4	n.c.	–		
	X3	24 V out of ASi	n.c.	0 V out of ASi	I3	n.c.	–		
	X4	24 V out of ASi	n.c.	0 V out of ASi	I2	n.c.	–		

Line termination with sealing profile

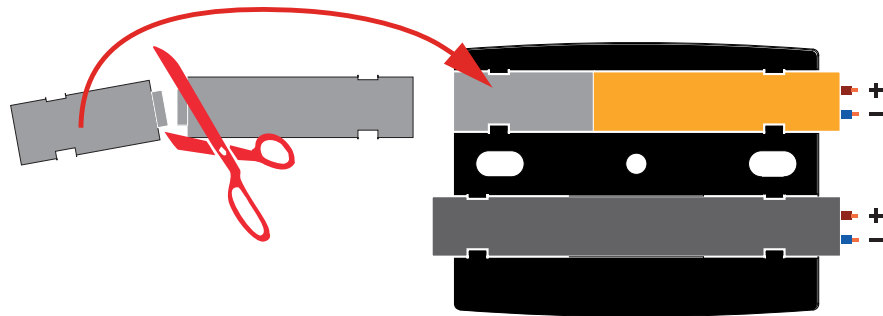

Accessories:

- Sealing profile IP67 (IDC plug), 60 mm (art. no. BW3282)
- ASi-5/ASi-3 Address Programming Device (art. no. BW4925)