




Push-in Terminals Kit for 1 Module

Double-Level Push-in Terminals for connecting ASi and AUX

Push-in Terminals for Gateways to connect ASi and AUX

Push-in Terminals Kit as a replacement for the terminal blocks of ASi Gateways

Screw Terminals Kit for 1 Module

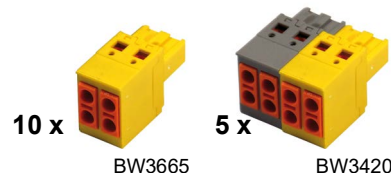

Article no. BW3531: Push-in Terminals Kit for 1 Module

Article no. BW3420: Double Level Push-in Terminals for connecting ASi and AUX

Article no. BW3532: Screw Terminals Kit for 1 Module

Article no. BW3665: Double Level Push-in Terminals for connecting ASi

Article no. BW3906: Push-in Terminals Kit for ASi Gateways in Stainless Steel resp. ASi Gateways with integrated Safety Monitor to connect ASi and AUX

Article no. BW4043: Push-in Terminals Kit as a replacement for the terminal blocks of ASi Gateways

Article no.	BW3665	BW3420
General		
Packing unit	10 x double level push-in terminals, 2 poles, yellow	5 x double level push-in terminals, 2 poles, yellow + 5 x double level push-in terminals, 2 poles, gray
Pitch	5 mm	
Type of contact	socket (female), internally bridged	
Nominal cross section	1,5 mm ²	

Article no.	BW3665	BW3420
Conductor cross section		
Conductor cross section solid	0,2 ... 1,5 mm ²	
2 conductors with same cross section, solid	-	
Conductor cross section, flexible	0,2 ... 1,5 mm ²	
2 conductors with same cross section, stranded	-	
Conductor cross section, flexible, with ferrule	• without plastic sleeve: 0,25 ... 1,5 mm ²	
	• with plastic sleeve: 0,25 ... 1,5 mm ²	
2 conductors with same cross section, stranded, with ferrules	-	
2 conductors with same cross section, stranded, with TWIN ferrules	-	
AWG	24 ... 16	
Stripped insulation length	10 mm	

Article no.	BW3906	BW3531	BW4043	BW3532
General				
Packing unit	6 x push-in terminals, 2 poles, yellow + 2 x push-in terminals 2 poles, black + 2 x push-in terminals, 3 poles, black	5 x push-in terminals, 4 poles, black + 1 x push-in terminals, 2 poles, yellow + 1 x push-in terminals, 2 poles, gray	2 x push-in terminals, 9 poles, green	5 x screw terminals, 4 poles, black + 1 x screw terminals, 2 poles, yellow + 1 x screw terminals, 2 poles, gray
Pitch	5 mm			
Type of contact	socket (female)			
Nominal cross section	2,5 mm ²			
Conductor cross section				
Conductor cross section solid	0,2 ... 2,5 mm ²			
2 conductors with same cross section, solid	-		0,2 ... 1,0 mm ²	
Conductor cross section, flexible	0,2 ... 2,5 mm ²			
2 conductors with same cross section, stranded	-		0,2 ... 1,5 mm ²	
Conductor cross section, flexible, with ferrule	• without plastic sleeve: 0,25 ... 2,5 mm ²		• without plastic sleeve: 0,25 ... 2,5 mm ²	
	• with plastic sleeve: 0,25 ... 2,5 mm ²			
2 conductors with same cross section, stranded, with ferrules	-		• without plastic sleeve: 0,25 ... 1,0 mm ²	
2 conductors with same cross section, stranded, with TWIN ferrules	• with plastic sleeve: 0,5 ... 1,5 mm ²		- • with plastic sleeve: 0,5 ... 1,5 mm ²	
AWG	24 ... 14		26 ... 12	
Stripped insulation length	10 mm			