

# Active Distributor ASi Safety, IP67

1 x connector for profile cable

Periphery connection via  
M12 cable socket, angled, 8 poles



(Figure similar)

Figure	Inputs Safety, SIL 3, Cat. 4	Safety signal inputs	Inputs digital	Outputs digital	Input voltage (sensor supply) (1)	Output voltage (actuator supply) (2)	Connection (3)	ASi address (4)	Special function	Art. no.
	1 x 2-channels	floating contacts	–	1 x electronic	–	out of ASi	1 x M12 cable socket, angled, 8 poles	1 single address	to connect TURCK E-Stop button SSA-EB1PLYR-12ECQ8	<b>BWU5129</b>

- (1) **Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.
- (2) **Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential
- (3) **Connection:** further connection options are available on request.

M12 cable socket, angled	M12 cable socket, straight	M8 cable socket, straight	round cable / connecting wires	Push in terminals
PUR line: oil resistant				

- (4) **ASi address:** 1 AB address (max. 62 AB addresses/ASi network), 2 AB addresses (max. 31 modules with 2 AB addresses), Single addresses (max. 31 Single addresses/ASi network), mixed use allowed.  
For modules with two ASi nodes the second ASi node is turned off as long as the first ASi node is addressed to address "0".  
Upon request, ASi nodes are available with specific ASi address profiles.

<b>Article No.</b>	<b>BWU5129</b>
<b>General data</b>	
Device type	safe input
<b>Connection</b>	
ASi/AUX connection	profile cable and piercing technology
Periphery connection	1 x M12 cable socket, angled, 8 poles
Round cable	2 m
	max. allowed tensile strain 10 N
<b>ASi</b>	
Profile	S-7.B.0, ID1=F
Address	1 single address
Required Master profile	≥M3
As of ASi specification	2.1
Operating voltage	30 V (21,6 ... 31.6 V)
Max. current consumption	max. 245 mA
Max. current consumption without sensor/ actuator supply	65 mA
<b>Input</b>	
Number	1 x 2-channels safe input
Safety signal	floating contacts
Switching current	35 mA (T = 40 µs), continuously 5 mA at 24 V
Power supply	out of ASi
Sensor supply	short-circuit and overload protected according to EN 61131-2
Power supply of attached sensors	–
Switching threshold	2 mA, R ≤ 150 Ω
<b>Output</b>	
Number	1
Power supply	out of ASi
Output	short-circuit and overload protected according to EN 61131-2
Max. output current	100 mA
<b>Display</b>	
LED ASi/FLT (red/green)	green: ASi voltage OK, ASi node online green/red: ASi voltage on, but ASi node offline green flashing/red: address 0 red/green flashing: peripheral fault <sup>(1)</sup> off: no ASi voltage
LEDs S1, S2 (yellow)	state of inputs S1, S2
LED O1 (yellow)	state of output O1

<b>Article No.</b>	<b>BWU5129</b>
<b>Environment</b>	
Applied standards	EN ISO 13849-1 PLe cat4 EN ISO 13849-2 EN 62061 SIL3 EN 62026-2 EN 61000-6-2 EN 61000-6-4 EN 60529
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes <sup>(2)</sup>
Operating altitude	max. 2000 m
Ambient temperature	-30 °C ... +60 °C <sup>(3)</sup>
Storage temperature	-25 °C ... +85 °C
Housing	plastic, for screw mounting, suitable for cable ducts (installation depth ≥35 mm)
Pollution Degree	2
Protection category	IP67
Tolerable loading referring to humidity	according to EN 61131-2
Maximum tolerable shock and vibration stress	≤15g, T≤11 ms 10 ... 55 Hz, 0,5 mm amplitude
Insulation voltage	≥500 V
Weight	100 g
Dimensions (W / H / D) in mm	60 / 45 / 35

(1) see table "Peripheral fault indication"

(2) The module is suitable for use in passively safe paths as it has no connection to an AUX potential.

(3) Down to -25 °C with flexibly mounted cable, -30 °C only with fixed mounted cable.

Article no.	Peripheral fault indication		
	Overload sensor supply	Output short circuited	AUX voltage missing
BWU5129	-	-	-

Programming	ASi bit assignment			
	D3	D2	D1	D0
	safe input			
BWU5129	S2	S2	S1	S1
	output			
BWU5129	-	-	-	O1
	parameter bit			
	P3	P2	P1	P0
BWU5129	not used	not used	not used	0= off / 1= on (Watchdog)

## Pin assignment


Signal name	Explanation
Sx+, Sx-	safe input x
O1	digital output x
24V <sub>out of ASi</sub>	power supply, out of ASi, positive pole (sensor supply)
0V <sub>out of ASi</sub>	power supply, out of ASi, negative pole (sensor supply)
ASi+, ASi-	connection to ASi bus
n.c. (not connected)	not connected

Connections: M12 cable sockets, straight, 8 poles										
Article no.	connec.	Pin1 (WH)	Pin2 (BN)	Pin3 (GN)	Pin4 (YE)	Pin5 (GY)	Pin6 (PK)	Pin7 (BU)	Pin8 (RD)	
BWU5129	X1	n.c.	24 V out of ASi	O1	S2+	S2-	S1+	0 V out of ASi	S1-	

### Line termination with sealing profile



max. IP54

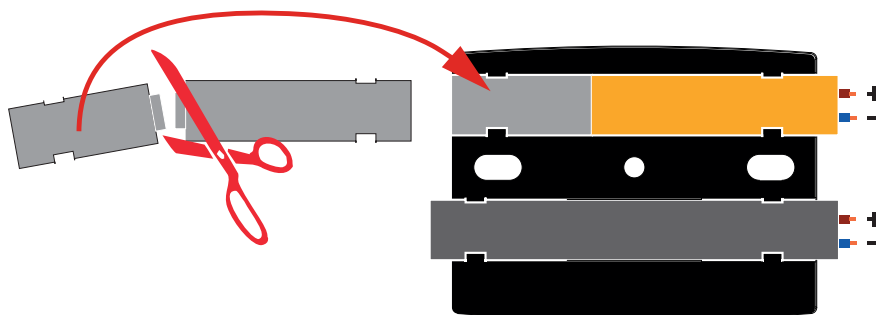

### Accessories:

- Sealing profile IP67 (IDC plug), 60 mm (art. no. BW3282)
- ASi-5/ASi-3 Address Programming Device (art. no. BW4925)
- Bihl+Wiedemann Safety Suite License - Safety Software for Configuration, Diagnostics and Commissioning (art. no. BW2916)