

ASi-5 motor module for 48 V motorized rollers Interroll EC5000 AI, 2M/4I

ASi-5 motor module for 48 V motorized rollers, IP67, M12, 2M/4I

New standard ASi-5

suitable for

2 x 48 V motorized rollers Interroll EC5000 AI with 20 W/35 W/50 W

Cyclic writing of speed and ramps possible


4 x digital inputs for sensor connection

Protection category IP67



(figure similar)



Figure	Drive ⁽¹⁾	Number of drives	Line protection fuse ⁽²⁾	Inputs digital	Input voltage (sensor supply) ⁽³⁾	Output voltage (actuator supply) ⁽⁴⁾	Connection	ASi connection ⁽⁵⁾	Article No.
	Interroll	2	yes, separately for each motor, 4,0 A (slow-blow fuse)	4	out of ASi	out of AUX (48 V)	4 x M12 sockets, 5 poles	ASi profile cable	BWU4212

(1) Drive:

Under certain circumstances also suitable for control of motorized rollers from other manufacturers with the same technical data. Please compare the manufacturer's specifications with the current values and the pin assignment of the motor module.

(2) Line protection fuse:

In the motor module UL approved fuses are placed before each of the motor supply connections. A short circuit in the motor causes this fuse to blow, protecting the connection cable between the module and motor.

After blowing the not exchangeable fuse the module is no longer functional and the module needs to be replaced. The characteristics of the fuse must be checked against the motor data before using the module.

The protection circuit in the module allows a very simple protection of the motor cables. The fuse for the cable protection is a slow-blow one; without short circuit the robust behavior of the module remains.

(3) Input voltage (sensor supply):

Inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.

(4) Output voltage (actuator supply):

Outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential.

(5) ASi connection:

The connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M8 socket.

ASi-5 motor module for 48 V motorized rollers Interroll EC5000 AI, 2M/4I

Article no.		BWU4212
General data		
Motorized rollers		2 x Interroll (EC5000 AI, 48V, 20 W/35 W/50 W)
Connection		
ASi/AUX connection		profile cable and piercing technology
Periphery connection		M12
ASi		
Address		1 ASi-5 address
Required ASi specification of master		ASi-5
ASi process data width		4 byte ⁽²⁾
Operating voltage		30 V (18 ... 31.6 V)
Max. current consumption		200 mA
AUX		
Voltage		48 V _{DC} (45 ... 51 V) ⁽³⁾
Max. current consumption		at 20 W: 1,4 A continuously, 3,0 A peak
		at 35 W: 2,4 A continuously, 5,6 A peak
		at 50 W: 3,4 A continuously, 7,6 A peak
Input		
Number		4
Power supply		out of ASi
Power supply of attached sensors	up to +40 °C	120 mA ⁽⁴⁾
	at +55 °C	80 mA ⁽⁴⁾
	at +70 °C	40 mA ⁽⁴⁾
Switching threshold		U _{in} < 5 V (low) U _{in} > 10 V (high)
Drive		
Number		2
Power supply		out of AUX (48 V) ⁽³⁾ (galvanic separation)
Overload voltage tolerated by reaction (AUX)		60 V-resistant brake chopper compatible
Max. output current		10 mA per output
Supply of motors		out of AUX (48 V) ⁽³⁾
Max. current for motor supply	up to +40 °C	per motor: 1,7 A continuously ⁽⁵⁾
	at +55 °C	per motor: 1,35 A continuously ⁽⁵⁾
	at +70 °C	per motor: 1,0 A continuously ⁽⁵⁾
Line protection fuse		yes, separately for each motor, 4,0 A, at 8 A (200%) release between 1 s and 120 s, fuse UL certified ⁽⁶⁾
Display		
LED ASi (green)		on: ASi voltage on off: no ASi voltage
LED FLT/FAULT (red)		on: no data exchange flashing: peripheral fault ⁽⁷⁾ off: data exchange ok
LED AUX (green)		on: 48 V DC AUX off: no 48 V DC AUX
LEDs I1 ... In (yellow)		state of inputs I1 ... I4
LEDs M1, M2 (yellow)		state of motors M1, M2 on: motor on off: motor off
LEDs ERR1, ERR2 (red) ⁽¹⁾		on: fuse at motor M1, M2 is blown ⁽⁷⁾ flashing: Motor M1, M2 is signaling fault condition or is not connected to the module ⁽⁷⁾

ASi-5 motor module for 48 V motorized rollers Interroll EC5000 AI, 2M/4I

Article no.	BWU4212
Environment	
Applied standards	EN 61000-6-2, EN 61000-6-4, EN 60529 UL 61010-1 UL 61010-2-201
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes ⁽⁸⁾
Operating altitude	max. 2000 m
Operating temperature	-30 °C ... +70 °C ^{(4) (5)}
Storage temperature	-25 °C ... +85 °C
Housing	plastic, for DIN rail mounting
Protection category	IP67
Tolerable loading referring to humidity	according to EN 61131-2
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2
Max. tolerable vibration stress	5 ... 8 Hz 50 mm _{pp} /8 ... 500 Hz 6g, acc. EN 61131-2
Isolation voltage	≥ 500 V
Weight	200 g
Dimensions (W / H / D in mm)	45 / 80 / 38 (without substructure module)

(1) The ERR LED is not controlled when the motor ports are deactivated

(2) The ASi-5 process data bandwidth depends on the ASi-5 profile. Further selectable profiles can be found in the hardware catalog of the Bihl+Wiedemann Suite or in the configuration manual.

(3)




Notice


48 V_{DC} **must not** be connected to:
device with 24 V_{DC} operating voltage (see data sheet of the manufacturer)

- the ASi connection of the device
- the ASi gateway


(4)

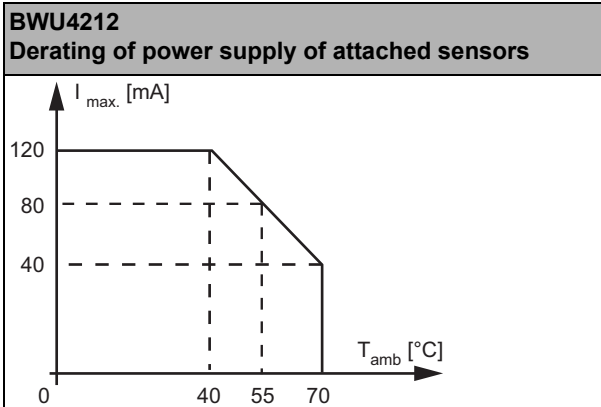


ASi-5 motor module for 48 V motorized rollers Interroll EC5000 AI, 2M/4I

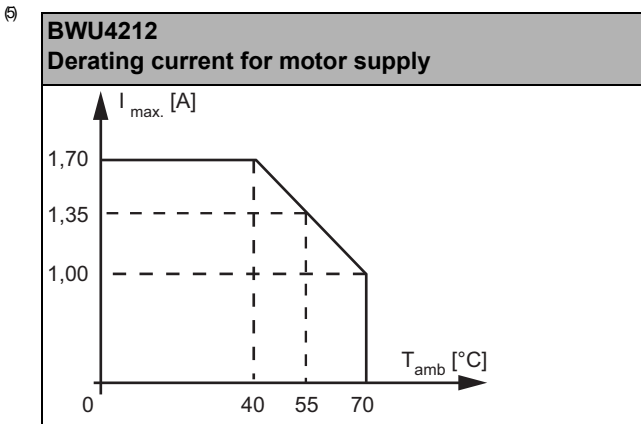

- (6) In the motor module UL approved fuses are placed before each of the motor supply connections. A short circuit in the motor causes this fuse to blow, protecting the connection cable between the module and motor. After blowing the fuse the module is no longer functional and needs to be replaced. The characteristics of the fuse must be checked against the motor data before using the module. The protection circuit in the module allows a very simple protection of the motor cables. The fuse for the cable protection is a slow-blow one; without short circuit the robust behavior of the module remains.

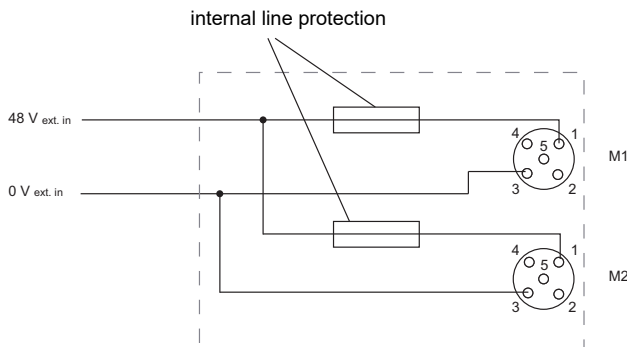

- (7) see table "Peripheral fault indication".
- (8) The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

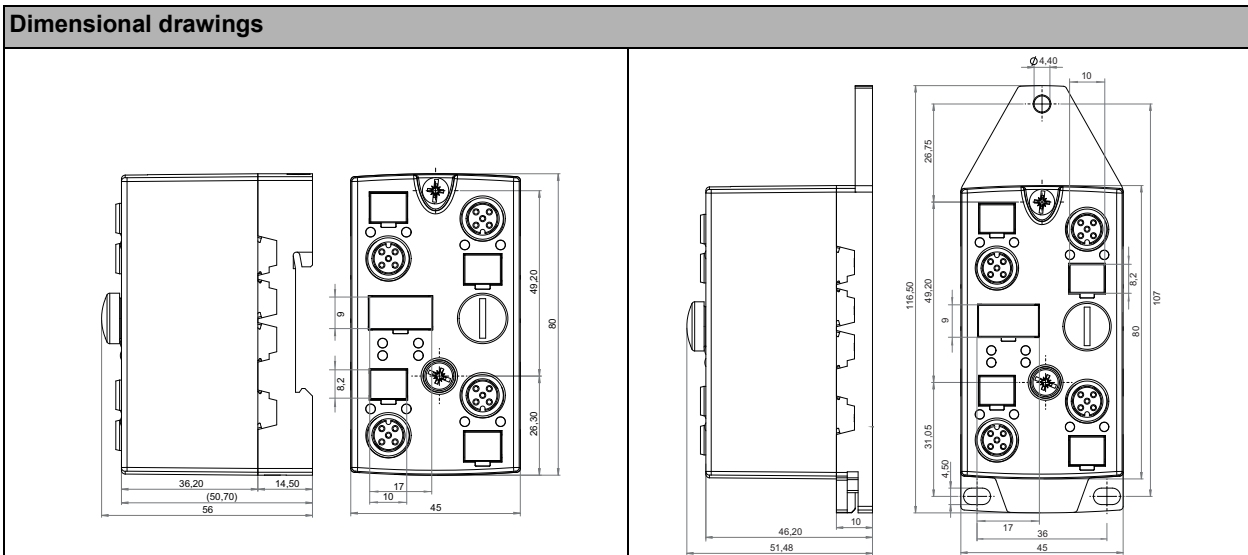

Article no.	Peripheral fault indication			
	Overload output	AUX voltage missing	Overload sensor supply	at least 1 motor fuse is blown or 1 motor in fault condition or is not connected to the module
BWU4212	•	•	•	•

ASi-5 motor module for 48 V motorized rollers Interroll EC5000 AI, 2M/4I

Programming (ASi bit assignment)

Article no.	Byte	bit							
		D7	D6	D5	D4	D3	D2	D1	D0
		input							
BWU4212	0	Fuse M2	Fuse M1	Error M2 ⁽¹⁾	Error M1 ⁽¹⁾	I4	I3	I2	I1
	1	reserved	Temperature Error	Voltage Error	reserved			Error M2 (alternative) ^{(1) (2)}	Error M1 (alternative) ^{(1) (2)}
	2	AUX- voltage (mV), high byte, UINT16							
	3	AUX- voltage (mV), low byte, UINT16							

(1) The motor ports can be deactivated individually using the software ASIMON360 (BW2916) or ASi Control Tools360 (BW2902).

(2) Alternative to byte 0 bit D5 + D4. Functionally and contentwise the same.

Article no.	Byte	bit							
		D7	D6	D5	D4	D3	D2	D1	D0
		output							
BWU4212	0	Speed M1 ⁽¹⁾ (speed motor 1) (- 100 ... 0 ... 100 percent), INT8							
	1	Speed M2 ⁽¹⁾ (speed motor 2) (- 100 ... 0 ... 100 percent), INT8							
	2	ramp M1 (0 ... 25,5 s), UINT8 ⁽²⁾							
	3	ramp M2 (0 ... 25,5 s), UINT8 ⁽²⁾							

(1) The motor ports can be deactivated individually using the software ASIMON360 (BW2916) or ASi Control Tools360 (BW2902).


(2) Time for setpoint step by $\pm 100\%$ (acceleration, deceleration)

Pin assignment


Signal name	Explanation
Ix	digital input x
CW Mx	Direction of rotation of motor x
Error Mx	Indicating error at motor x (error = high impedance; no error = 0 V)
Speed Mx	Speed of motor x
48 V _{ext out}	Power supply, out of external voltage, positive pole (AUX, actuator supply)
0 V _{ext out}	Power supply, out of external voltage, negative pole (AUX, actuator supply)
ASi+, ASi-	connection to ASi bus
24 V _{out of ASi}	Power supply, out of ASi, positive pole (sensor supply)
0 V _{out of ASi}	Power supply, out of ASi, negative pole (sensor supply)
n.c.	not connected

ASi-5 motor module for 48 V motorized rollers Interroll EC5000 AI, 2M/4I

Connections								
Article no.	M12 connection	Name	Function	Pin1	Pin2	Pin3	Pin4	Pin5
BWU4212	X1	I1/I2	input 1, 2	24 V _{out} of ASi	I2	0 V _{out} of ASi	I1	n.c.
	X2	I3/I4	input 3, 4	24 V _{out} of ASi	I4	0 V _{out} of ASi	I3	n.c.
	X3 ⁽¹⁾	M1/ERR1	motor 1	48 V _{ext} out	CW M1	0 V _{ext} out	Error M1	Speed M1
	X4 ⁽¹⁾	M2/ERR2	motor 2	48 V _{ext} out	CW M2	0 V _{ext} out	Error M2	Speed M2
	ADDR (protection cap)	connection for ASi-5 addressing plug						

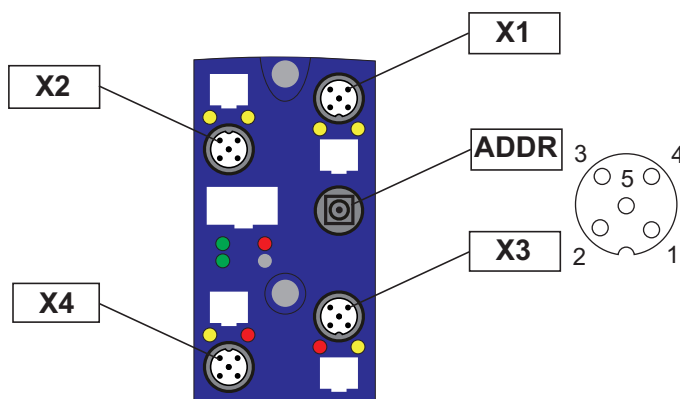

(1)



Notice

Incorrect wiring at the motor sockets can cause a device defect.

Accessories:

- Connection cable for ItohDenki Motor Rollers, M12 cable plug, straight, 5 poles to M8 snap-in cable socket, straight, 5 poles, cable length 2 m (art. no. BW2755)
- Connection cable for ItohDenki Motor Rollers, M12 cable plug, straight, 5 poles to M8 snap-in cable socket, straight, 5 poles, cable length 1,2 m (art. no. BW3030)
- ASi substructure module for 4-channel module in 45 mm-housing (art. no. BW2349)
- ASi substructure module (CNOMO) for 4-channel module in 45 mm-housing (art. no. BW2350)
- Universal protection cap ASi-5/ASi-3 for M12 sockets, IP67 (art. no. BW4056)
- Sealing profile IP67 (IDC plug), 45 mm (art. no. BW3283)
- Passive Distributor AUX, 16A/20A, profile cable branch, depth 19 mm, IP67 (art. no. BWU3306)
- Passive Distributor AUX, 16A/20A, infeed module, depth 19 mm, IP67 (art. no. BWU3307)
- Passive Distributor AUX, 16A/20A to 4 x spring type terminals 2,5 mm², depth 29 mm, IP20 (art. no. BW3348)
- AUX 48 V profile cable, EPDM, gray, 2 wires, 2,5 mm², 100 m (art. no. BW4243)
- ASi-5/ASi-3 Address Programming Device (art. no. BW4925)
- It is recommended to use pre-assembled cables to connect the motors to the module.