

ASi-5 Safety Input Module, IP67, M12

4 x 1-channel safe inputs or 2 x 2-channel safe inputs for
2 x floating contacts

up to 4 standard inputs, depending on configuration


up to 4 standard outputs, depending on configuration

protection category IP67



(Figure similar)



Figure	Type	Inputs Safety ⁽¹⁾	Safety signal inputs	Inputs digital	Outputs digital	Input voltage (sensor supply) ⁽²⁾	Output voltage (actuator supply) ⁽³⁾	ASi connection ⁽⁴⁾	ASi address ⁽⁵⁾	Article no.
	IP67, 4x M12, ASi-5 Safety	4 x 1-channel or 2 x 2-channels	floating contacts	up to 4, depending on configuration	up to 4 x electronic, depending on configuration	out of AUX	out of AUX	ASi via profile cable	1 ASi-5 address	BWU4393

(1) **Inputs Safety**

Safe inputs can be configured as 1-channel or 2-channel depending on the desired application or PL and SIL level. Suitable for applications up to category 4/PLe/SIL3.

(2) **Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.

(3) **Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential

(4) **ASi connection:** the connection to ASi as well to AUX (auxiliary 24V power) is either made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).

(5) **ASi address:** 1 AB address (max. 62 AB addresses/ASi network), 2 AB addresses (max. 31 modules with 2 AB addresses), Single addresses (max. 31 Single addresses/ASi network), mixed use allowed.
For modules with two ASi nodes the second ASi node is turned off as long as the first ASi node is addressed to address "0".
Upon request, ASi nodes are available with specific ASi address profiles.

ASi-5 Safety Input Module, IP67, M12

Article no.		BWU4393
Connection		
ASi/AUX connection		profile cable and piercing technology
Periphery connection		M12, Y or mixed wiring, freely selectable for each M12 connection ⁽¹⁾
Length of connector cable		I/O: max. 15 m ⁽²⁾
ASi		
Adresse		1 ASi-5 address
Required ASi specification of the Master		ASi-5
Operating voltage		30 V _{DC} (18 ... 31,6 V)
Max. current consumption		100 mA
Max. current consumption without sensor/actuator supply		100 mA
AUX		
Voltage		24 V _{DC} (20 ... 30 V) (PELV) ⁽³⁾
Max. current consumption		2.0 A max.
Input		
Number		up to 4, depending on configuration
Power supply		out of AUX
Sensor supply		short-circuit and overload protected, acc. to EN 61131-2
Supply of attached sensors	up to +40 °C	200 mA per sensor supply/pin1
	at +55 °C	
	at +70 °C	
Switching threshold		U < 5 V (low) U > 15 V (high)
Output		
Number		up to 4 x electronic, depending on configuration
Power supply		out of AUX
Output		short-circuit and overload protected, acc. to EN 61131-2
Max. output current	up to +40 °C	350 mA per output, Σ (Out) 1400 mA
	at +55 °C	
	at +70 °C	
Input Safety, SIL 3, Cat. 4		
Number		4 x 1-channel safe inputs (SIL1, Cat. 2, PLc) or 2 x 2-channel safe inputs (SIL3, Cat. 4, PLe)
Safety signal		floating contacts
Power supply		out of AUX
Switching current		15 mA (T = 100µs), continuously 4 mA at 24 V
Max. output current for OSSD supply		–
OSSD test pulses		–
OSSD test pulse width		–
Input level		10 mA, R < 150 Ω

Article no.	BWU4393
Display	
LED ASi (green)	on: ASi voltage on flashing: ASi voltage on, but peripheral fault ⁽⁴⁾ or address 0 off: no ASi voltage
LED FLT/FAULT (red)	on: ASi address 0 or ASi node offline flashing: peripheral fault ⁽⁴⁾ off: ASi node online
LED AUX (green)	on: 24 V _{DC} AUX off: no 24 V _{DC} AUX
LEDs I/O1 ... I/On (yellow)	state of inputs I1 ... I4 or outputs O1 ... O4, depending on configuration
LEDs S11/S12, S21/S22 (yellow)	state of safe input channels SI1 ... SI4
Environment	
Applied standards	EN 61000-2 EN 61000-3 EN 61131-2 EN 62061 EN ISO 13849-1 EN 60529
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	no ⁽⁵⁾
Operating altitude	max. 2000 m
Ambient operating temperature	-30 °C ... +55 °C (up to max. +70 °C) ⁽⁶⁾
Storage temperature	-25 °C ... +85 °C
Housing	plastic, for screw mounting
Pollution Degree	2
Protection category	IP67 ⁽⁷⁾
Tolerable loading referring to humidity	according to EN 61131-2
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2
Max. tolerable vibration stress	5 ... 8 Hz 50 mm _{pp} /8 ... 500 Hz 6g, acc. EN 61131-2
Voltage of insulation	≥500 V
Weight	200 g
Dimension (W / H / D in mm)	45 / 80 / 56

(1) M12 wiring:

Single wiring: 1 input or output per connection.

Y wiring: 2 inputs or outputs per connection.

Mixed wiring: 1 input and 1 output per connection.

(2) loop resistance ≤150 Ω

(3) The ground connection of the 24 V power supply, which supplies auxiliary power (AUX), must be grounded!


(4) See table "Peripheral fault indication"

(5) The module is not suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors cannot be assumed for the connection of the two ASi and AUX potentials.

If the module is supplied from an unswitched AUX cable, this has no influence on the safety consideration for the paths with passively safe-switched AUX cable. In an ASi circuit, paths supplied from a passively safe-switched AUX cable and paths supplied from unswitched AUX potential can be used together.

(6) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

(7) IP67 can only be achieved if all open M12 sockets are sealed with suitable protection caps (see accessories).

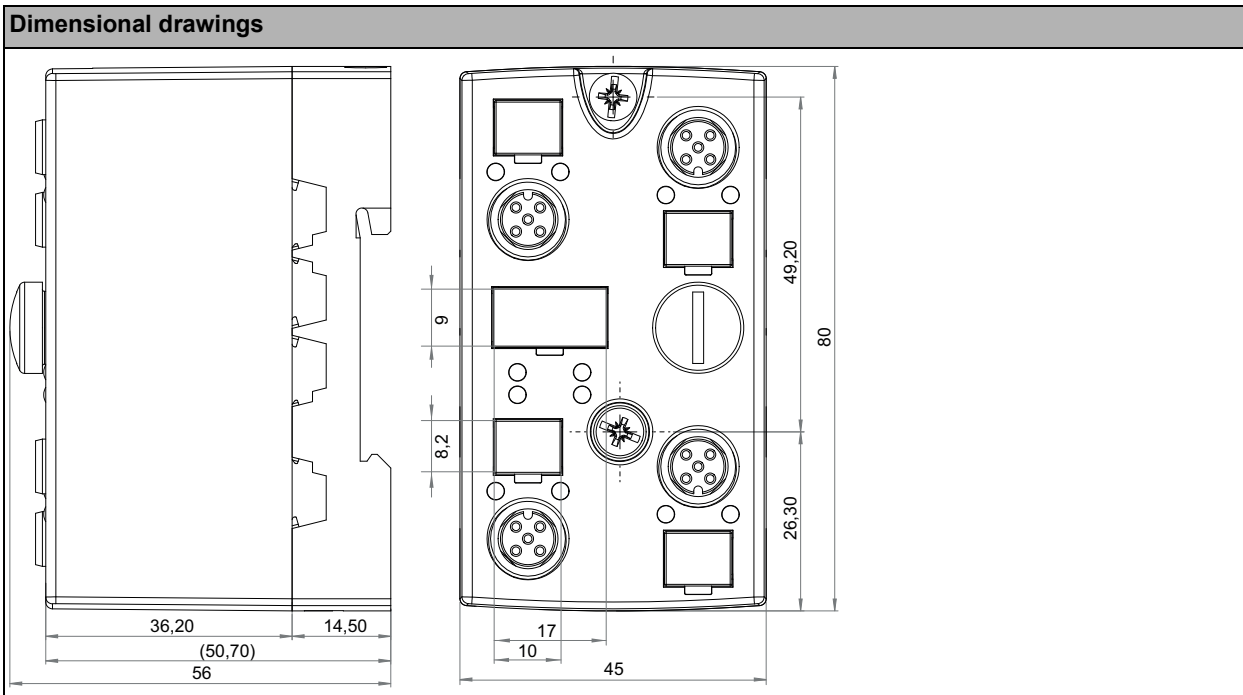

Article no.	Peripheral fault indication				
	Overload sensor supply	Output short circuited	Cross connection	Output overload	AUX voltage missing
BWU4393	•	•	•	•	•

Programming: ASi bit assingment

Article no.	Byte	Bit							
		D7	D6	D5	D4	D3	D2	D1	D0
BWU4393	0	reserved				SI4	SI3	SI2	SI1
	1	reserved				I4	I3	I2	I1

Article no.	Byte	Bit							
		D7	D6	D5	D4	D3	D2	D1	D0
BWU4393	0	reserved							
	1	reserved				O4	O3	O2	O1

Pin assignment

Signal name	Explanation
Sx1/Sx2	safe input channel x
I/Ox	standard input x or standard output x, freely configurable
24 V _{ext out}	output, power supply out of external 24 V, positive pole
0 V _{ext out}	output, power supply out of external 24 V, negative pole
Reset	reset signal
ASi+, ASi-	connection to ASi bus
n.c. (not connected)	not connected

Connections							
Article no.	M12 conn.	Denom.	Pin1	Pin2	Pin3	Pin4	Pin5
BWU4393	X1	SI1/SI2	SI1+	SI1-	SI2+	SI2-	n.c.
	X2	SI3/SI4	SI3+	SI3-	SI4+	SI4-	n.c.
	X3	I/O1, I/O2	24 V _{ext out}	I/O2	0 V _{ext out}	I/O1	n.c.
	X4	I/O3, I/O4	24 V _{ext out}	I/O4	0 V _{ext out}	I/O3	n.c.
	ADDR (protection cap)	connection for ASi-5 addressing plug					

Accessories:

- Bihl-Wiedemann Suite - Safety Software for Configuration, Diagnostics and Programming (art. no. BW2916)
- ASi substructure module (CNOMO) for 4 channel module in 45 mm housing, screw mounting (art. no. BW2350)
- ASi substructure module (CNOMO) for 4 channel module in 45 mm housing, DIN rail mounting (art. no. BW2349)
- Universal protection cap ASi-5/ASi-3 for M12 sockets, IP67 (art. no. BW4056)
- Sealing profile IP67 (IDC plug), 45 mm (art. no. BW3283)
- ASi-5/ASi-3 Address Programming Device (art. no. BW4925)