

Active Distributor ASi, IP67, M12, 1M/3I

2 x connectors for profile cable

Periphery connection via

1 x M12 cable socket, straight, 8 poles +
3 x M12 cable sockets, straight, 5 poles

For SEW MOVIMOT with binary control

Compatible to option MLK11A

Suitable for option with plug connector AVR1



(figure similar)



Figure	Type	Number of Drives	Inputs digital	Outputs digital	Input voltage (sensor supply) (1)	Output voltage (actuator supply) (2)	ASi connection (3)	Connection (4)	ASi address (5)	Special function	Art. no.
	IP67, depth 35 mm	1	3	–	I1 out of AUX, I2 ... I4 out of ASi	out of AUX	ASi profile cable	1 x M12 cable socket, straight, 8 poles + 3 x M12 cable socket, straight, 5 poles	1 single address	for connecting SEW MOVIMOT to ASi	BWU3781

- (1) **Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.
- (2) **Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential
- (3) **ASi connection:** the connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).
- (4) **Connection:** further connection options are available on request.



M12 cable socket, angled	M12 cable socket, straight	M8 cable socket, straight	round cable / connecting wires	Push in terminals
PUR line: oil resistant				

- (5) **ASi address:** 1 AB address (max. 62 AB addresses/ASi network), 2 AB addresses (max. 31 modules with 2 AB addresses), Single addresses (max. 31 Single addresses/ASi network), mixed use allowed.
For modules with two ASi nodes the second ASi node is turned off as long as the first ASi node is addressed to address "0".
Upon request, ASi nodes are available with specific ASi address profiles.

Article No.		BWU3781
General data		
Device type		input/output
Connection		
ASi/AUX connection		profile cable and piercing technology
Periphery connection		1 x M12 cable socket, straight, 8 poles + 3 x M12 cable sockets, straight, 5 poles
M12 wiring ⁽¹⁾		single wiring (I2 ... I4)
Length of connector cable		1 m (I1, O1 ... O4), 0,3 m (I2 ... I4) max. allowed tensile strain 10 N
ASi		
Profile		S-7.0.E (ID1=F default)
Address		1 single address
Required Master profile		≥M0
As of ASi specification		2
Operating voltage		30 V _{DC} (18 ... 31.6 V)
Max. current consumption		165 mA
Max. current consumption without sensor/ actuator supply		45 mA
AUX		
Operating voltage		24 V _{DC} (18 ... 30 V)
Max. current consumption		3 A
Input		
Number		3 (I2 ... I4)
Power supply		out of ASi
Power supply of attached sensors	up to +40 °C	120 mA ⁽²⁾
	at +55 °C	80 mA ⁽²⁾
	at +60 °C	60 mA ⁽²⁾
Switching threshold		U < 5 V (low) U > 15 V (high)
Drive		
Number		1 (I1, O1 ... O4)
Power supply		out of AUX
Output		short-circuit and overload protected according to EN 61131-2
Max. output current	up to +40 °C	∑ (Motor) ≤ 3 A ⁽³⁾
	at +55 °C	∑ (Motor) ≤ 2 A ⁽³⁾
	at +60 °C	∑ (Motor) ≤ 1,5 A ⁽³⁾
Safe disconnection of output voltage		yes up to PLe
Display		
LED ASi/FLT (red/green)		green: ASi voltage on, ASi node online green/red: ASi voltage on, but ASi node offline green flashing/red: address 0 green/red flashing: peripheral fault ⁽⁴⁾ off: no ASi voltage
LED AUX (green)		on: 24 V _{DC} AUX off: no 24 V _{DC} AUX
LED I1 ... In (yellow)		state of inputs I1 ... I4
LED O1 ... On (yellow)		state of outputs O1 ... O4

Article No.	BWU3781
Environment	
Applied standards	EN ISO 13849-1 PLe EN ISO13849-2 EN 62026-2 EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes ⁽⁵⁾
Operating altitude	max. 2000 m
Ambient temperature	-30 °C ... +60 °C ⁽²⁾ ⁽³⁾ ⁽⁶⁾
Storage temperature	-25 °C ... +85 °C
Housing	plastic, screw mounting, suitable for cable ducts (installation depth ≥35mm)
Pollution Degree	2
Protection category	IP67
Tolerable loading referring to humidity	according to EN 61131-2
Maximum tolerable shock and vibration stress	≤15g, T≤11 ms 10 ... 55 Hz, 0,5 mm amplitude
Insulation voltage	≥500 V
Weight	100 g
Dimensions (W / H / D) in mm	60 / 45 / 35

- (1) **M12 wiring:** either as a single-wiring, Y-wiring or mixed-wiring.
 Single-Wiring: 1 input or output per connection.
 Y-Wiring: 2 inputs or outputs per connection.
 Mixed-Wiring: 1 input and 1 output per connection.

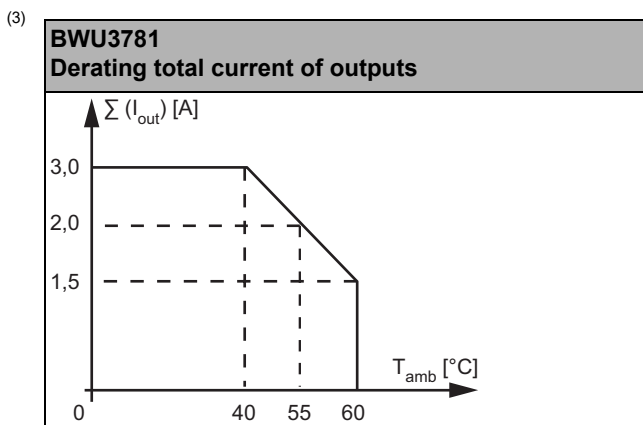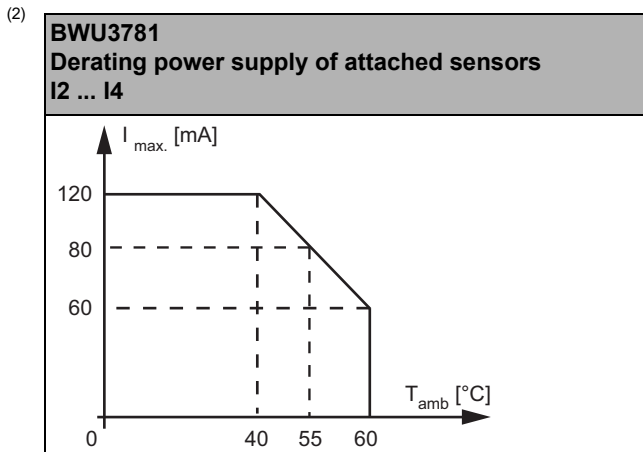

- (4) see table "Peripheral fault indication"
- (5) The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.
- (6) Down to -25 °C with flexibly mounted cable, -30 °C only with fixed mounted cable.

Article no.	Peripheral fault indication		
	Overload sensor supply	Output short circuited	AUX voltage missing
BWU3781	•	-	•

Programming	Parameter bit			
	D3	D2	D1	D0
	input			
BWU3781	I4	I3	I2	I1
	output			
BWU3781	O4 (24 V)	O3 (f1/f2)	O2 (L)	O1 (R)
	parameter bit			
	P0	P1	P2	P3
BWU3781	not used	0= on / 1= off (synchronous I/O mode)	0= off / 1= on (peripheral fault, if AUX missing)	0= off / 1= on (Watchdog)

Pin assignment

Signal name	Explanation
Ix	digital input x
Ox	digital output x
24V _{ext out}	power supply, out of external voltage, positive pole (AUX, actuator supply)
0V _{ext out}	power supply, out of external voltage, negative pole (AUX, actuator supply)
24V _{out of ASi}	power supply, out of ASi, positive pole (sensor supply)
0V _{out of ASi}	power supply, out of ASi, negative pole (sensor supply)
ASi +, ASi -	connection to ASi bus
n.c. (not connected)	not connected


Connections:

Article no.	M12, 8 poles	Pin1 (WH)	Pin2 (BN)	Pin3 (GN)	Pin4 (YE)	Pin5 (GY)	Pin6 (PK)	Pin7 (BU)	Pin8 (RD)	
BWU3781	X1	I1 (K1b)	O4 (24 V)	O1 (R)	O2 (L)	O3 (f1/f2)	n.c. (K1a)	0 V ext out	n.c.	
	M12, 5 poles	Pin1 (BN)	Pin2 (WH)	Pin3 (BU)	Pin4 (BK)	Pin5 (-)				
	X2	24 V out of ASi	n.c.	0 V out of ASi	I4	n.c.		-		
	X3	24 V out of ASi	n.c.	0 V out of ASi	I3	n.c.		-		
	X4	24 V out of ASi	n.c.	0 V out of ASi	I2	n.c.		-		

Line termination with sealing profile



max. IP54

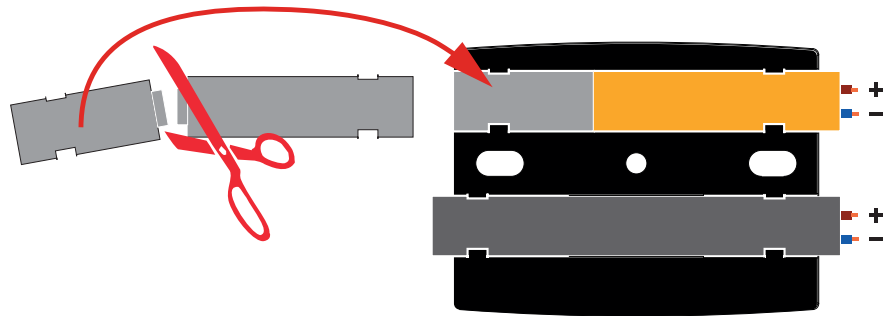

Accessories:

- Sealing profile IP67 (IDC plug), 60 mm (art. no. BW3282)
- ASi-5/ASi-3 Address Programming Device (art. no. BW4925)